


## Subscriber Termination Closure

## LB-TB2 Series


Lindsay Broadband LB-TB2 series is a compact indoor/outdoor wall mount subscriber termination closure, designed to transition outdoor incoming fiber to indoor fiber drops in FTTH networks. The LB-TB2 is capable of handling up to 2 SC adapters or 4 LC adapters and is equipped with a small hinged splice tray that allows for fiber storage under the splice tray. The indoor/outdoor enclosure is made of ABS material. The closure has UV protected shell with a rubber gasket along the interior edge and at the drop entry ports for proper weather proofing. IP66 grade protection (dust tight and water tight)

### FEATURES

- Wall-mounted indoor or outdoor closure options
- Compact size (208mm L X 153mm W X 52mm D)
- Will accommodate 1 or 2 fiber splices
- Fiber storage and management under splice tray to ensure bending radius of fibers are greater than 30 mm
- Accomodate up to 2 SC adapters or 4 FC adapters
- Supports splice or mechanical splice
- Can be ordered with adapters and pigtails installed
- IP 66 rating for ingress protection (Dust and water)
- Flame retardant Compliance with GB51698.7A

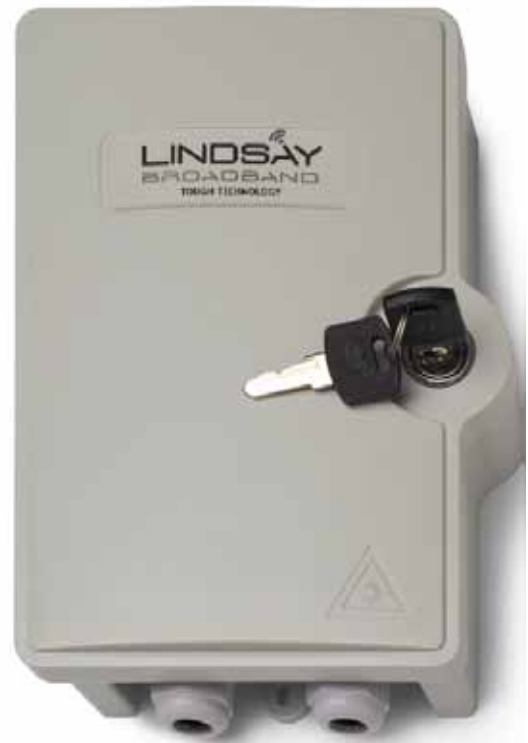

## Design

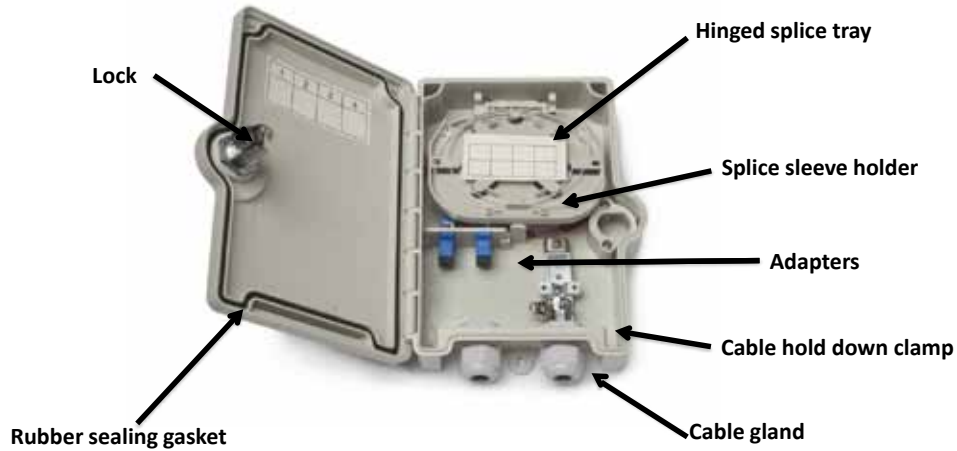

Splice protective sleeves      Splice secure clips



Fiber Management

## Ordering Information

		Number of Adapters	Optical Adapter	
LB-TB2	-	<u>X</u>	-	<u>XX</u>
		0		00= No adapters
		1		SA= SC/APC
		2		SU= SC/UPC

FOR MORE INFORMATION ON OUR WIRELESS, OPTICAL AND RF PRODUCTS  
 CALL 1-800-465-7046 OR  
 U.S. Sales Toll free: 877-672-4340  
[www.lindsaybroadbandinc.com](http://www.lindsaybroadbandinc.com)